

KV-2C-DP2 Series 60W

Whole Family: KV-XX060-2C-DP2 (XX=12/24/36/48VDC) [60W]



ICES-005



Class P

Class 2

IP20 SELV

RoHS



Features


| | |
|-------------------------|--|
| Output: | Constant Voltage |
| Range: | 100-277VAC |
| PFC design: | Built-in active PFC function |
| Efficiency: | Up to 90% |
| Protections: | Short circuit/ over load/ over temperature |
| Heat dissipation: | Cooling by free air convection |
| Waterproof performance: | IP20(EU); Full plastic protection housing, for dry and damp locations(US) |
| Dimming function: | DALI-2 & PUSH 2 in 1 dimming (CCT). PWM output frequency 4KHz. |
| Dimming range: | 0-100% dimming depth:0.1% |
| NFC function: | <ol style="list-style-type: none"> 1. Adjust output voltage slightly. 2. Set up address. |
| Application: | Suitable for LED lighting and moving sign applications |
| Warranty: | 5 years warranty |

DALI-2 & PUSH Dimmable LED Driver - Constant Voltage Output - KV-2C-DP2 Series 60W

Specification

| Model | | KV-12060-2C-DP2 | KV-24060-2C-DP2 | KV-36060-2C-DP2 | KV-48060-2C-DP2 | |
|-------------------------|---|--|--|--|--|-------------------------|
| Certificate | | UL / cUL / FCC / ICES-005 / Class 2 / Class P / ENEC / CE / SAA / RoHS / Reach / SELV / DALI-2 | | | | |
| Output | DC Voltage | 12V (12-13.5V adjust by NFC) | 24V (24-26V adjust by NFC) | 36V (36-38V adjust by NFC) | 48V (48-50V adjust by NFC) | |
| | Voltage Tolerance | ±0.2V | ±0.2V | ±0.2V | ±0.2V | |
| | Voltage Regulation | 0.5% | | | | |
| | Rated current | 5A | 2.5A | 1.67A | 1.25A | |
| | Rated power | 60W | | | | |
| | Load Regulation | 2% | 1% | | | |
| Input | Voltage Range | 100-277VAC | | | | |
| | Frequency Range | 47 - 63Hz | | | | |
| | Power Factor (Typ.) | PF ≥ 0.98@120VAC PF ≥ 0.96@230VAC PF ≥ 0.94@277VAC | | | | |
| | THD(Typ.) @ full load | ≤ 10%@120VAC ≤ 10%@230VAC ≤ 15%@277VAC | | | | |
| | Efficiency(Typ.) @ full load | 86.5%@120VAC 88.5%@230VAC 88.5%@277VAC | 88%@120VAC 89.5%@230VAC 89.5%@277VAC | 88.5%@120VAC 90%@230VAC 90%@277VAC | 88.5%@120VAC 90%@230VAC 90%@277VAC | |
| | AC Current (Max.) | 0.8A | | | | |
| | Inrush Current (Typ.) | 16A, 204us @50%120VAC | | 60.8A, 104us @50%230VAC | | 37.6A, 312us @50%277VAC |
| | Leakage current | <0.5mA | | | | |
| Protection | Short Circuit | Hiccup mode, recover automatically after fault condition is removed | | | | |
| | Over Load | ≤ 120% ,hiccup mode, recover automatically after fault condition is removed | | | | |
| | Over temperature | Shell surface temp.100°C±10°C shut down o/p voltage,recovers automatically after temp. drops. | | | | |
| Environment | Working TEMP. | -40~+60°C (see below derating curve) | | | | |
| | Working Humidity | 20 - 90%RH non-condensing | | | | |
| | StorageTEM.,Humidity | -40 - +80°C,10 - 95% RH | | | | |
| | TEMP.coefficient | ±0.03%/°C(0 - 50°C) | | | | |
| | Vibration | 10~500Hz, 2G 10min./1 cycle, period for 60min. each along X,Y,Z axes | | | | |
| Safety & EMC | Safety standards | EN61347-1; EN61347-2-13 (EU) & UL8750; CAN/CSA-C22.2 No.250.13 (US) | | | | |
| | Withstand voltage | I/P-O/P:3.75KVAC(EU) & I/P-O/P:1.80KVAC (US) | | | | |
| | Isolation resistance | I/P-O/P:100MΩ / 500VDC / 25°C / 70%RH | | | | |
| | EMC Emission | EN55015; EN61000-3-2,3 (EU) FCC Part15 Subpart B; ANSI C63.4a-2017; ICES-005 Issue 5 (US) | | | | |
| | EMC Immunity | EN61547; EN61000-4-2,3,4,5,6,11 (EU) & FCC/ICES do not request this test (US) | | | | |
| Others | Net Weight | 0.38Kg | | | | |
| | Dimension | 192.5*62*24mm (L*W*H) | | | | |
| | Packing | 280*210*160mm 20pcs/CTN | | | | |
| Notes | 1. All parameters NOT specially mentioned are measured at rated load and 25°Cof ambient temperature. 2. Tolerance: includes set up tolerance and load regulation . | | | | | |


Efficiency Curve (efficiency vs output load)

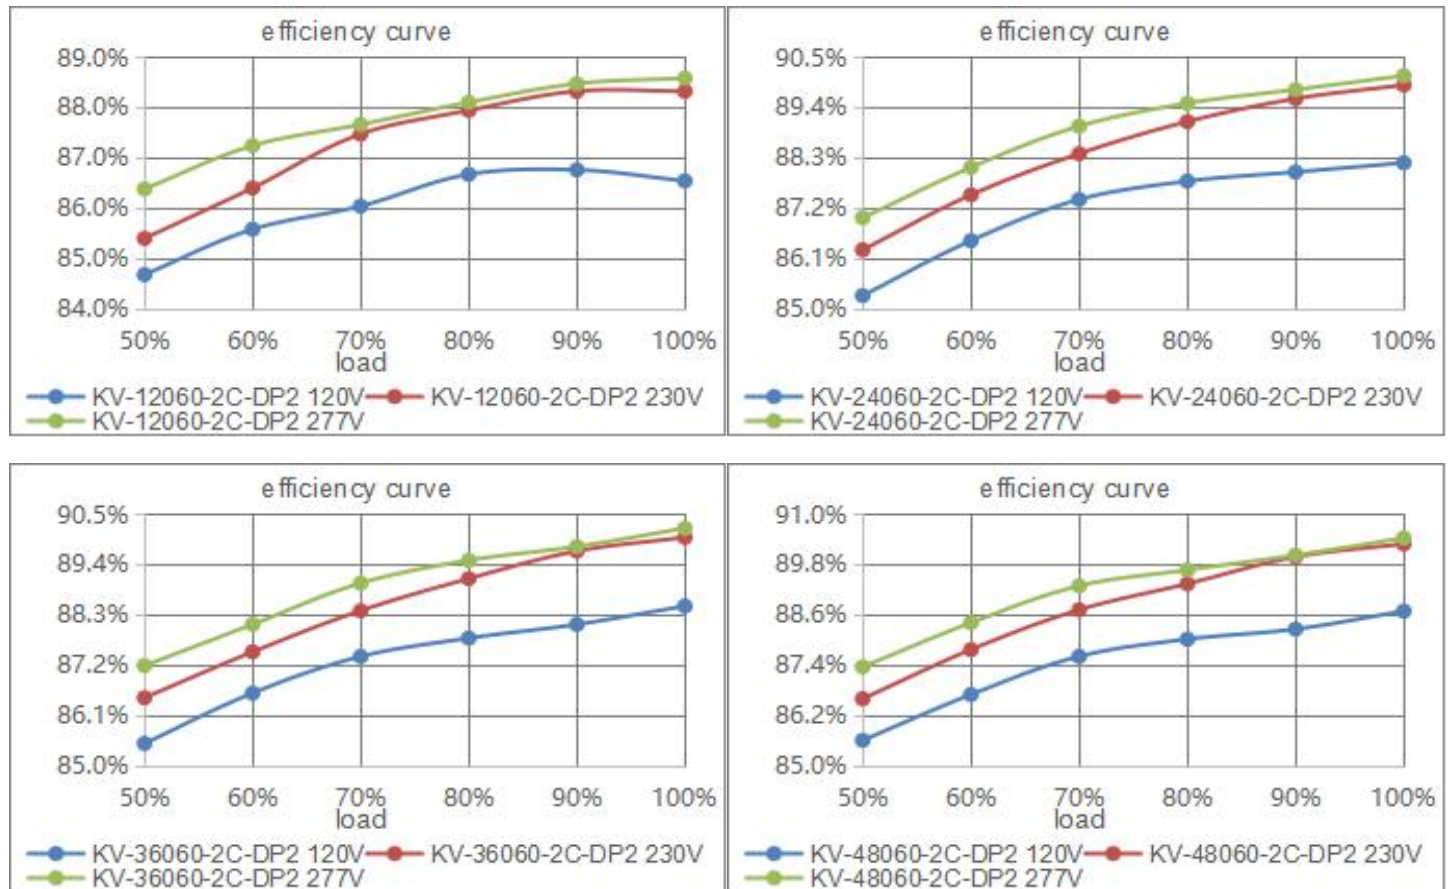

Power Factor Curve




Derating Curve (output load vs TEMP.)

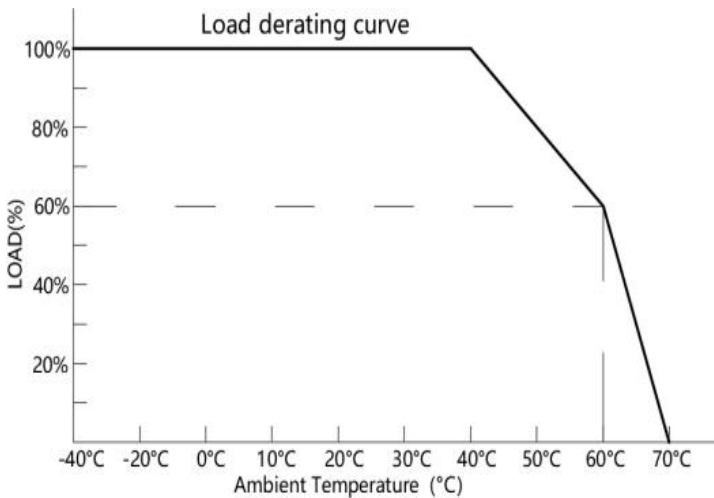

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. Please note that the rise in temperature of LED fixtures over a long period of time will cause their power to rise. Therefore, we recommend the power supply to reserve a certain amount of load to avoid overloading.

DALI-2 & PUSH Dimmable LED Driver - Constant Voltage Output - KV-2C-DP2 Series 60W

Mechanical Specification

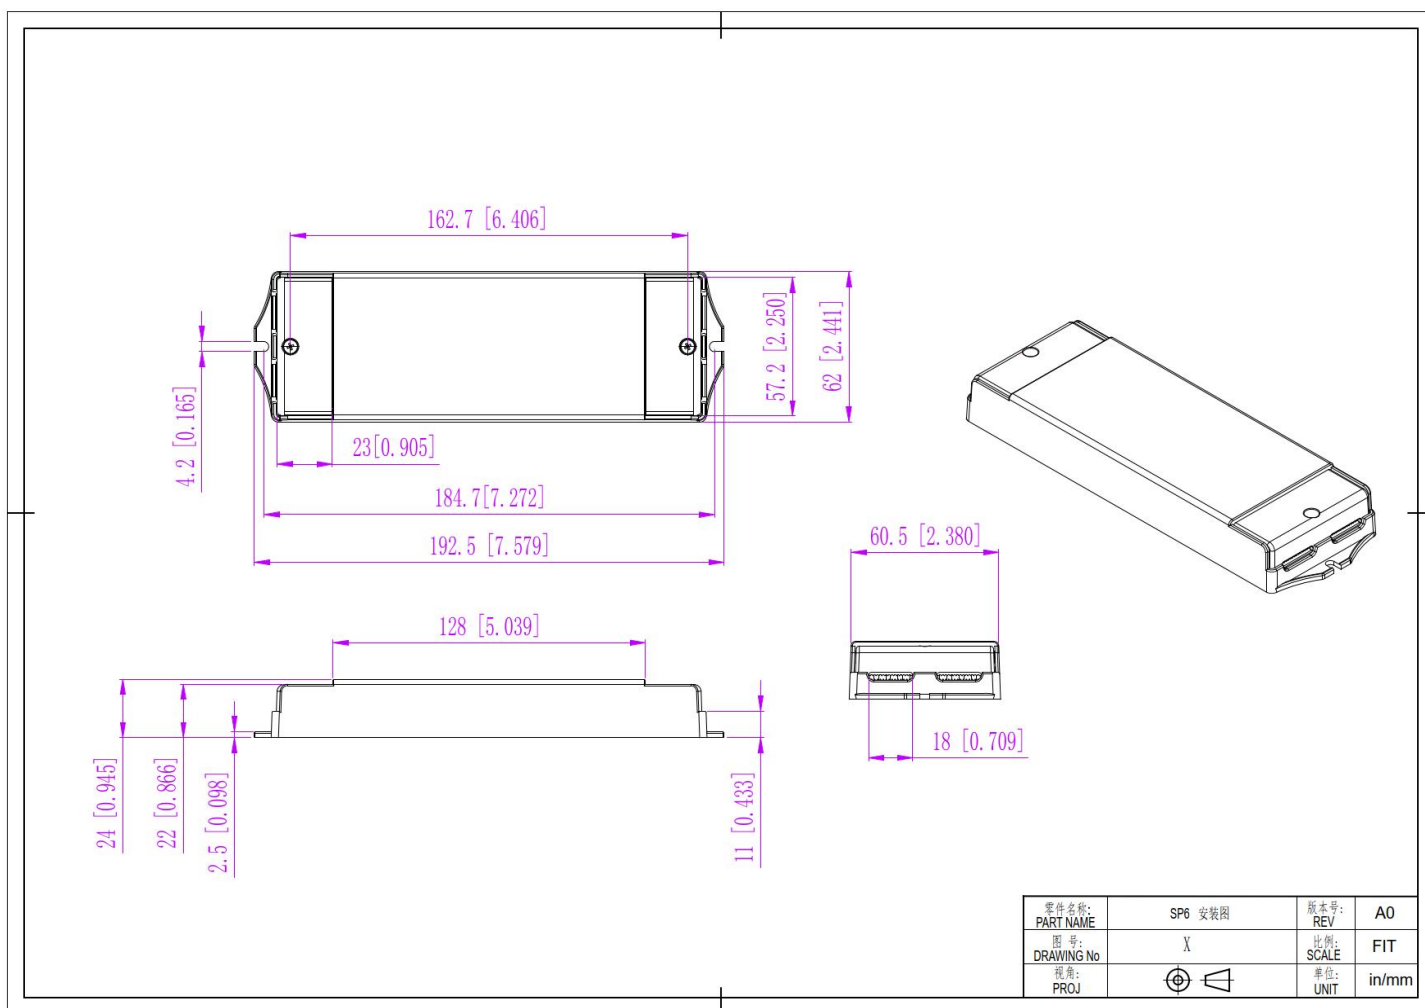

12V&24V&36V&48V Version


1. Input with DG128 terminals 3P: Live Wire AC (L), Neutral Wire AC(N) .
2. Output with DG128 terminals 3P: output Positive (LED+), output negative (LED-). Connected to LED Lamps.
3. DALI or PUSH Dim. terminals with DG128 terminals 3P:
when DALI dimming, signal dimming DA1, DA2 (No polar) connected to the BUS of the DALI Master;
when PUSH dimming, (N) is connected to AC (N) while (L) is connected to Push dim switch dimmer(L).

Warm tips:


1. Suggested wire diameter: Input 0.75mm² - 2mm²; Output: 0.5mm² - 2mm².
2. Any other requests for, we can customize.

Dimming Operation and Connecting Diagram (For European Market)


- Using DALI-2 dimming with DALI power and dimmer

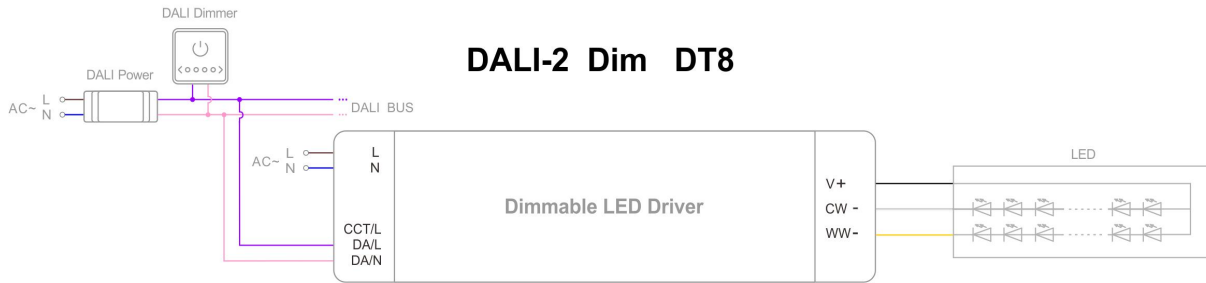

- Using DALI-2 dimming with DALI system and DALI bus


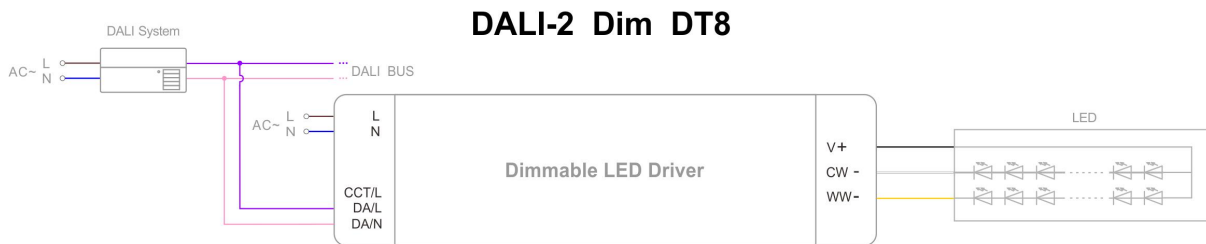


- Using DALI-2 dimming with intelligent device, DALI master and dimmer

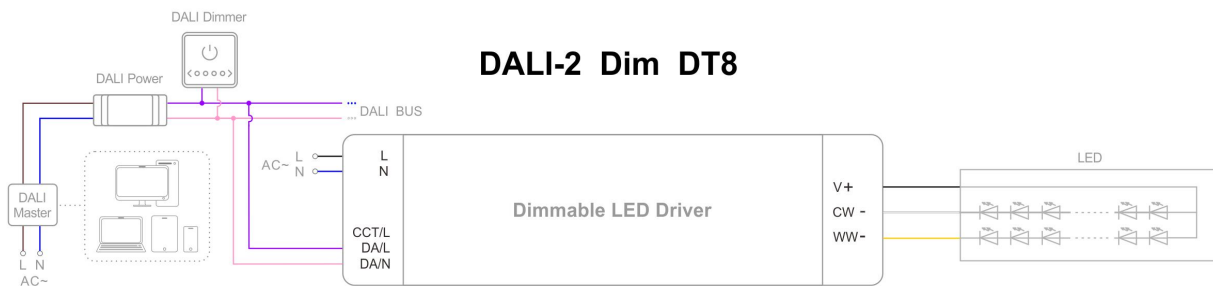


DALI-2 & PUSH Dimmable LED Driver - Constant Voltage Output - KV-2C-DP2 Series 60W

- Using PUSH dimming with dimmer (on & off function)

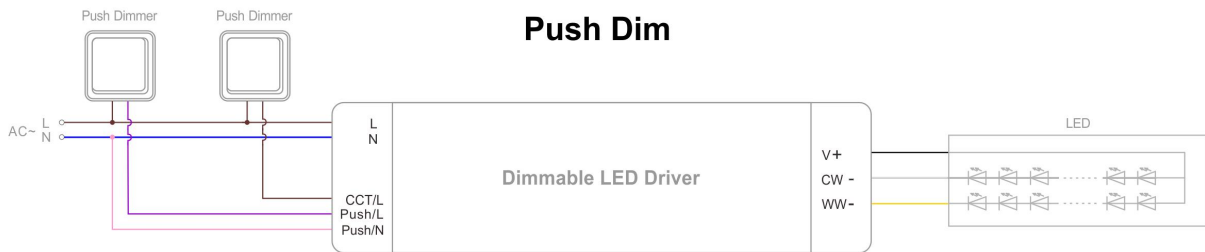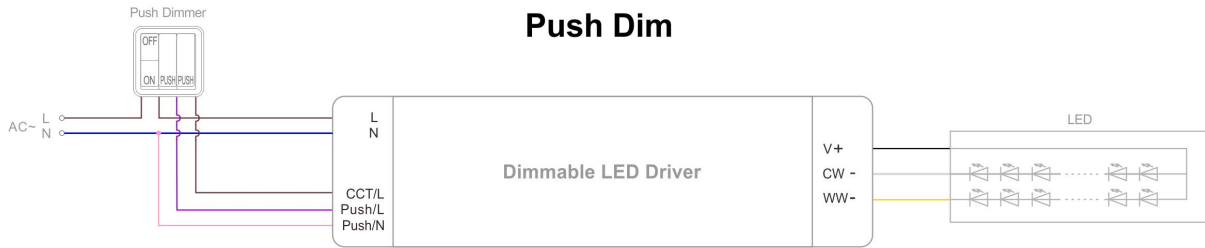


Dimming Operation and Connecting Diagram (For North American Market)


- Using DALI-2 dimming with DALI power and dimmer

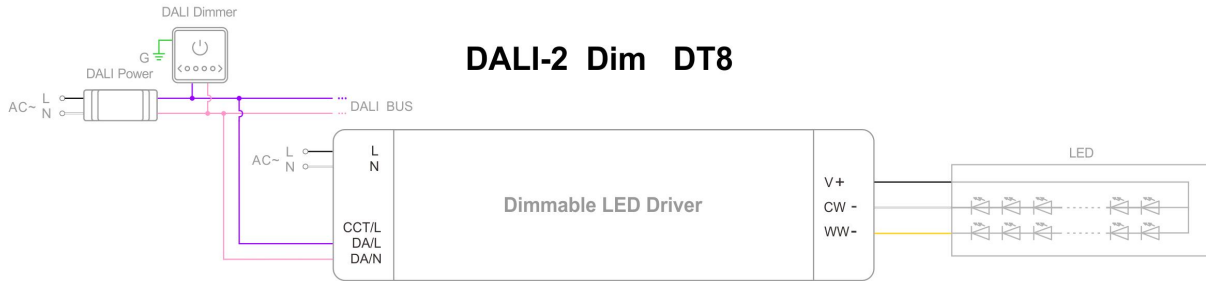



- Using DALI-2 dimming with DALI system and DALI bus

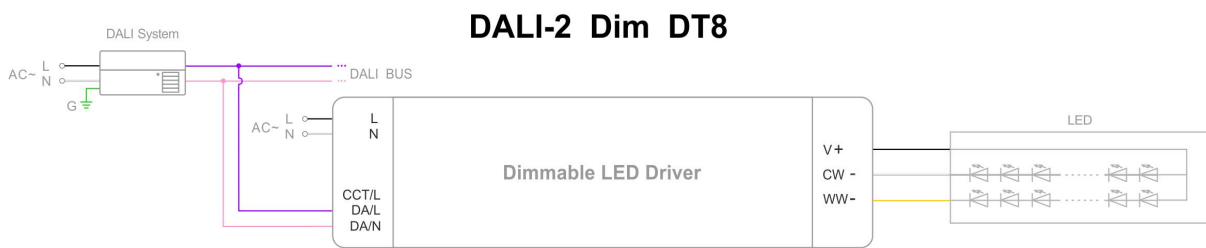

- Using DALI-2 dimming with intelligent device, DALI master and dimmer

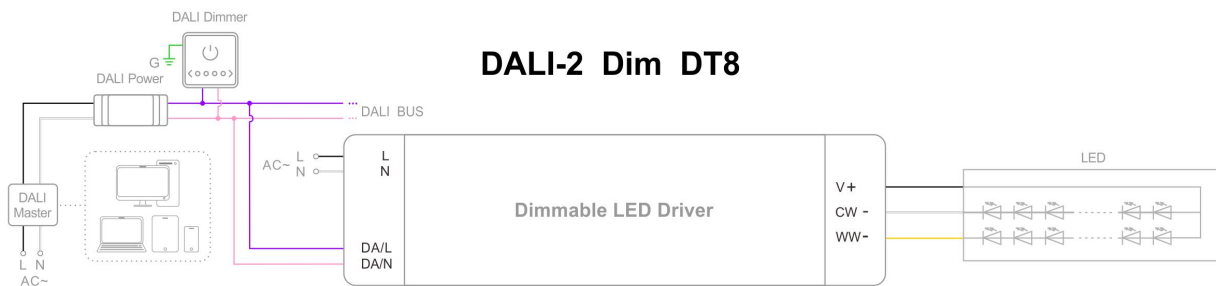

● Using PUSH dimming with dimmer (on & off function)

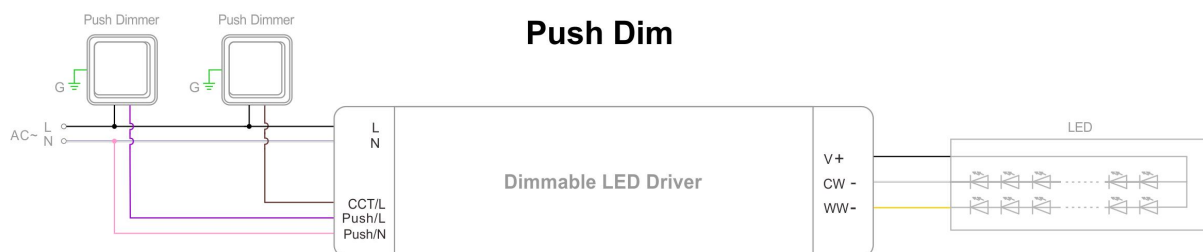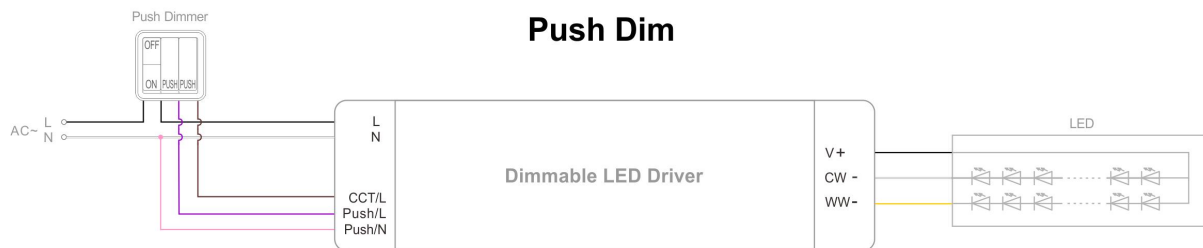

NFC Function



ProNFC APP



NFC Handheld devices



IOS Download



Android Download

Adjust output voltage slightly by NFC:

The output voltage can be read and written by a mobile with ProNFC APP or NFC handheld device (NFC read & write device: NFC-RW) by close to the NFC signal area of the Dimmable LED driver.

| NFC voltage regulation level | | | | | | | | | | |
|------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----------|
| | level 1 | level 2 | level 3 | level 4 | level 5 | level 6 | level 7 | level 8 | level 9 | level 10 |
| 12V | 12V | 12.16V | 12.32V | 12.48V | 12.64V | 12.80V | 12.96V | 13.12V | 13.28V | 13.5V |
| 24V | 24V | 24.22V | 24.44V | 24.66V | 24.88V | 25.10V | 25.32V | 25.54V | 25.66V | 26.0V |
| 36V | 36V | 36.22V | 36.44V | 36.66V | 36.88V | 37.10V | 37.32V | 37.54V | 37.66V | 38.00V |
| 48V | 48V | 48.22V | 48.44V | 48.66V | 48.88V | 49.1V | 49.32V | 49.54V | 49.66V | 50.00V |

Set Address easily by NFC

The address can be read and written by a mobile with Set NFC APP or NFC handheld device (NFC read & write device: NFC-RW) by close to the NFC signal area of the Dimmable LED driver.

Instructions

1. This driver should be installed by qualified and professional person.
2. Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that wiring is correct before test in order to avoid light and power supply damage.
4. If driver Cannot work normally, don't maintain privately.

Have any questions, please contact Zhuhai Shengchang.

Please visit our website or contact us for more information! www.scpower.net.cn/en